


Fittings are designed to provide the necessary changes in rake angles in handrail and provide a continuous gripping surface throughout the stair. Fitts Industries, Inc. offers fittings in five handrail profiles: F6010, F6210, F6410, F6710 and F6910. Fittings are designed in three major families:

Starting Fittings – The beginning of the handrail gripping surface
Transition Fittings – Fittings that are transitioning units of a handrail surface
Gooseneck Fittings – Fittings used to allow for transition in height and (or) direction in either a landing or a balcony handrail

FITTING CHARACTERISTICS

RIGHT HAND OR LEFT HAND – Fittings are determined to be a Right Hand or Left Hand by the natural act of ascending or climbing the stair.

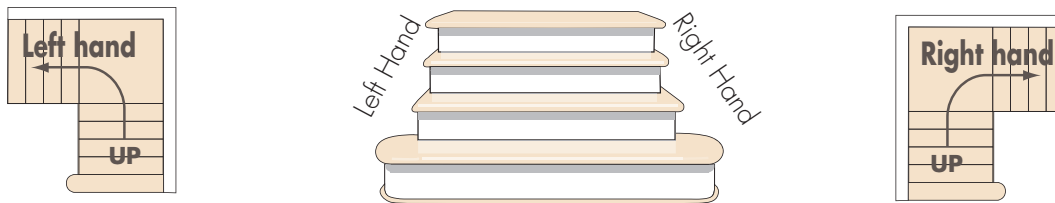

FITTING WITH CAP – Fittings that run over a newel post have a cap to accommodate the newel post.



ONE RISE, TWO RISE & THREE RISE – In the transition of handrail, often times fittings must make changes in height and (or) direction. The easiest way to gauge the rise of a fitting is to note how many rises intersect at a transitioning or landing newel.

